

UNLESS OTHERWISE STATED: DIMENSIONS IN MILLIMETRES; REMOVE BURRS AND SHARP EDGES; ALL CASTINGS AND MOULDINGS TO BE FREE FROM SINKS AND BLEMISHES. DO NOT SCALE DRAWING


	1	2	3	4	5	6	7	8
--	---	---	---	---	---	---	---	---

A  
B  
C  
D  
E  
F

COMPONENTS:

1. INDUCTOR:-  
INDUCTANCE - 1.6mH±5%  
DC RESISTANCE - <0.3Ω
2. CAPACITOR:- POLYPROPYLENE/POLYESTER  
CAPACITANCE - 10μF±5%  
VOLTAGE RATING - >100V
3. RESISTOR:- CERAMIC WIRE WOUND  
RESISTANCE - 10Ω±5%  
POWER RATING - 25W
4. CAPACITOR:- POLYPROPYLENE/POLYESTER  
CAPACITANCE - 3μF±5%  
VOLTAGE RATING - 250V
5. INDUCTOR:-  
INDUCTANCE - 0.16mH±5%  
DC RESISTANCE - <0.5Ω
6. CAPACITOR:- POLYPROPYLENE/POLYESTER  
CAPACITANCE - 8μF±5%  
VOLTAGE RATING - >100V
7. POLYSWITCH (OPTIONAL):- RAYCHEM RXE110, 60V, 40A MAX,  
1.10A HOLD, 2.20A TRIP

CIRCUIT DIAGRAM

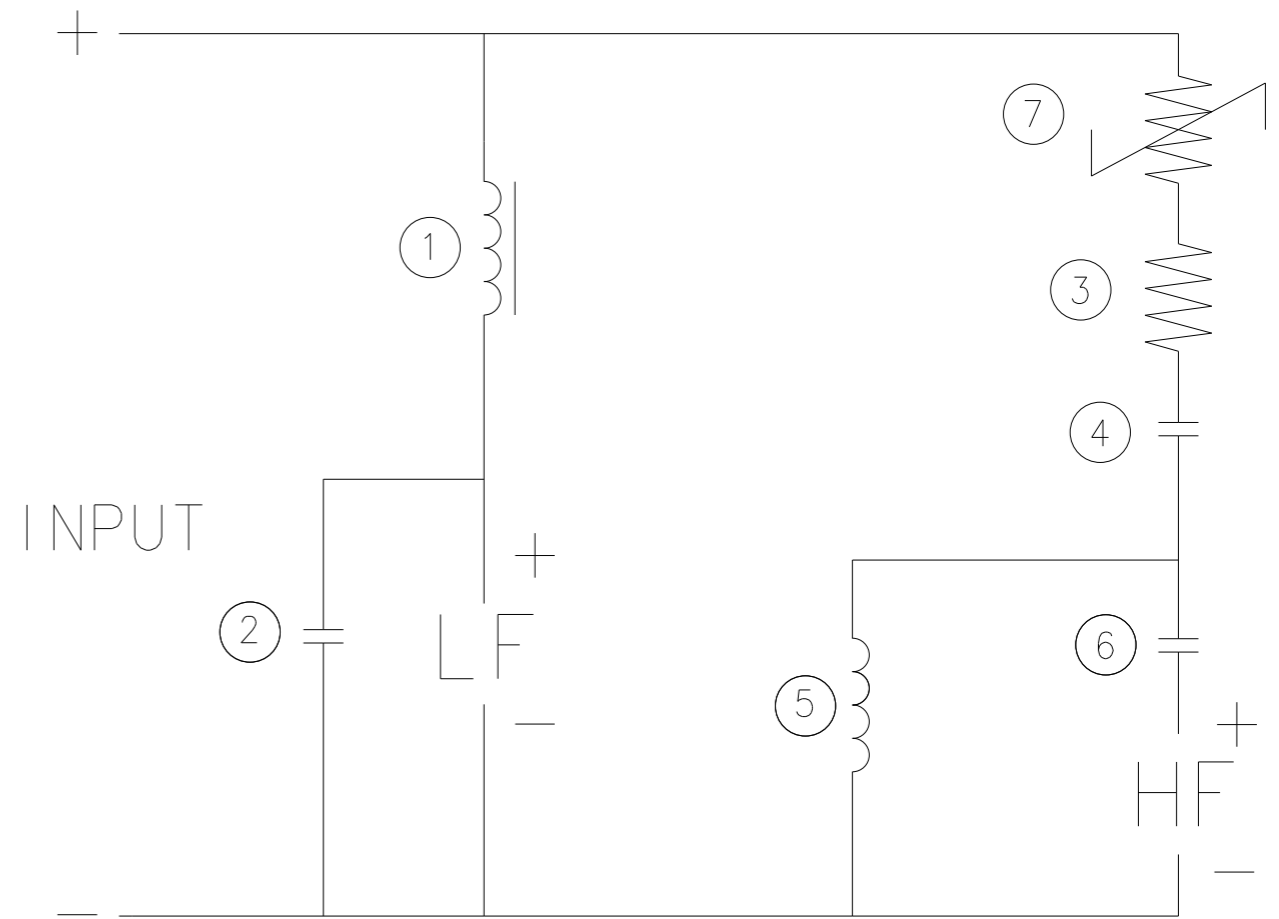

SEE SHEET ONE				
ISSUE	CHANGE NUMBER	DATE	REVISION DETAILS	ZONE

GENERAL TOLERANCE:

X.XX ±

X.X ±

X ±

ANGLES ± °

METRIC THREADS TO BS3643  
FIT 6g TO 6H

MATERIAL:

FINISH:

SIMILAR TO:



GP ACOUSTICS (UK) LTD.  
FOXHALL ROAD, IPSWICH, SUFFOLK, IP3 8JP, ENGLAND.  
TEL: +44 (0) 1473 322222 FAX: +44 (0) 1473 729662  
WEB SITE: www.celestion.com

DRAWN

DATE

CHECKED

APPROVED


J.MOTT

10/09/03

TITLE

SCALE

AT A3 1:1



DRAWN TO BS8888

15" KIT

SHEET 2 OF 2

DRG. No.

GA880