

ELECTRICAL CHARACTERISTICS

Test conditions (unless otherwise stated):

$V_{CC} = 12V$

$T_{amb} = +25^{\circ}C$

Characteristic	Symbol	Value			Units	Conditions
		Min.	Typ.	Max.		
Total current consumption	I_{CC}	9.5	13.5	17.5	mA	$f_{IF} = 5.5 \text{ MHz}$
IF voltage gain V_6/V_{14}	G_V		68		dB	
Output voltage with limiting at each output			250		mVp-p	$V_{in} = 0$
Output impedance Pin 8	R_8		1.1		k Ω	
Pin 12	R_{12}		1.1		k Ω	
Input impedance	R_3		2		k Ω	
Internal impedance	R_4		12		Ω	
DC level of output signal ($V_{in} = 0$)	V_8		4		V	
	V_{12}		5.6		V	
Stabilized voltage	V_4	4.2	4.8	5.3	V	
Residual IF voltage without deemphasis	V_8		20		mV	
	V_{12}		30		mV	
AF gain (AF not regulated)	V_8/V_3		7.5			$R_{4-5} = 5k\Omega, R_{5-1} = 13k\Omega$
Regulation at certain ratio of divider	V_{AF}/δ	20	28	36	dB	
Range of volume control (referred to pin 8)	$\frac{V_{AFmax}}{V_{AFmin}}$	70	85		dB	$f_{IF} = 5.5 \text{ MHz}, \Delta f = \pm 50 \text{ kHz}, f_{mod} = 1 \text{ kHz}$
Resistance (see note 1)	R_{4-5}	1		10	k Ω	
Input voltage for limitation	V_{inlim}		30	60	μV	
Hum suppression	V_8/V_{11}		35		dB	
	V_{12}/V_{11}		30		dB	
TBA 120T only:						
Input impedance	Z_{in}		800/5		Ω/pF	$f_{IF} = 5.5 \text{ MHz}$
AM suppression	a_{AM}	50	60		dB	$f_{IF} = 5.5 \text{ MHz}, \Delta f = \pm 50 \text{ kHz}, V_{in} = 500\mu V, f_{mod} = 1 \text{ kHz}, m = 30\%$
AF output voltage	V_8	650	900		mV	$f_{IF} = 5.5 \text{ MHz}, \Delta f = \pm 50 \text{ kHz}, f_{mod} = 1 \text{ kHz}$
	V_{12}	400	650		mV	
TBA 120U only:						
Input impedance	Z_{in}	15/6	40/4.5		k Ω/pf	$f_{IF} = 5.5 \text{ MHz}$
AM suppression	a_{AM}	50	60		dB	$f_{IF} = 5.5 \text{ MHz}, \Delta f = \pm 50 \text{ kHz}, V_{in} = 500\mu V, f_{mod} = 1 \text{ kHz}, m = 30\%$
AF output voltage	V_{8eff}	850	1200		mV	$f_{IF} = 5.5 \text{ MHz}, \Delta f = \pm 50 \text{ kHz}, V_{in} = 500\mu V, f_{mod} = 1 \text{ kHz}, Q_8 \approx 45, k = 4\%$
Harmonic distortion	V_{12eff}	600	1000		mV	
	k		1		%	$f_{IF} = 5.5 \text{ MHz}, \Delta f = \pm 50 \text{ kHz}, V_{in} = 10 \text{ mV}, f_{mod} = 1 \text{ kHz}, Q_8 \approx 20$

NOTE

1. If DC volume control is not used, pin 4 must be connected direct to pin 5.

ABSOLUTE MAXIMUM RATINGS

Supply voltage V_{CC}	18V	Reference voltage O/P current, I_4	5mA
Operating ambient temperature, T_{amb}	-10 to +65 $^{\circ}C$	IF input resistance, R_{13-14} (TBA120U)	< 1k Ω
Storage temperature, T_{stg}	-55 to +125 $^{\circ}C$	Range of supply operation, V_{CC}	10 to 18V
Total power dissipation, P_{tot}	400mW	Frequency range, f	0 to 12 MHz
Volume control voltage, V_5	6V		

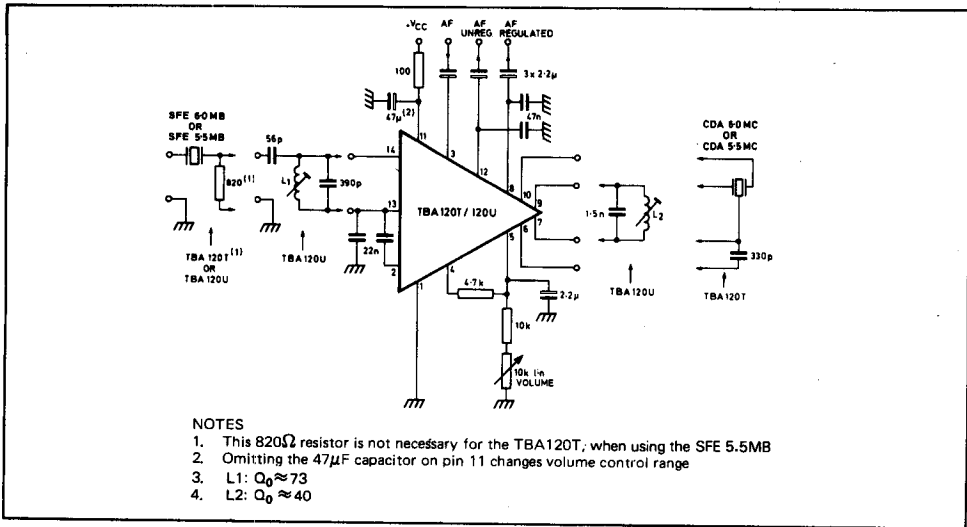


Fig. 3 Recommended application circuit

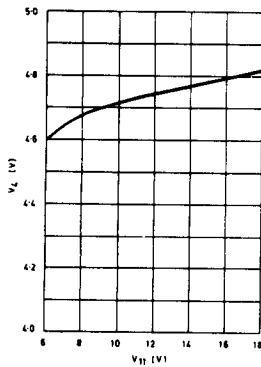


Fig. 4 Z voltage v. supply voltage

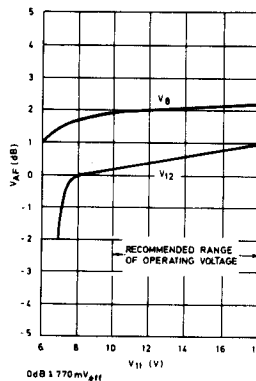


Fig. 5 AF output voltage v. supply voltage

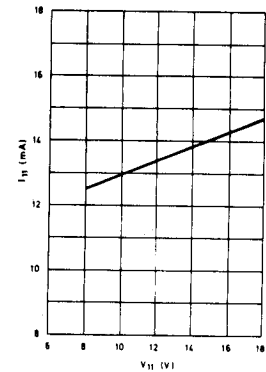


Fig. 6 Total current consumption v. supply voltage

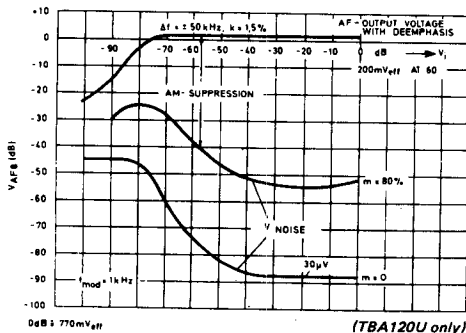


Fig. 7 AF output voltage and noise voltage v. input voltage (input Murata SFE 5.5MB)

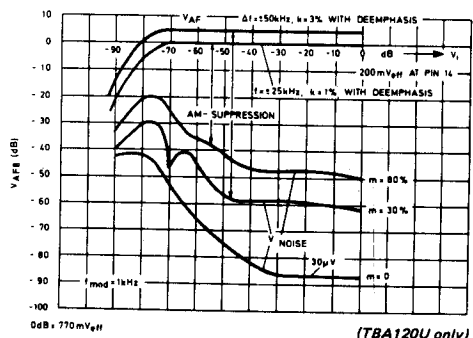


Fig. 8 AF output voltage and noise voltage v. input voltage (input 60Ω impedance, broadband)

TBA120T/TBA120U

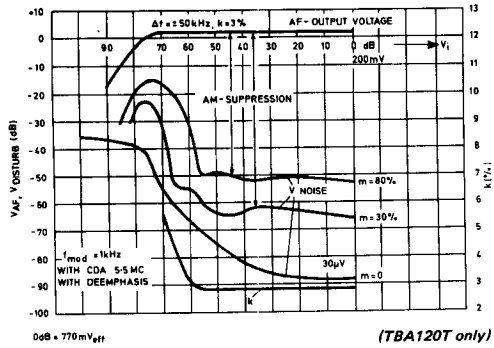


Fig. 9 AF output voltage (pin 8), noise voltage and harmonic distortion v. input voltage.

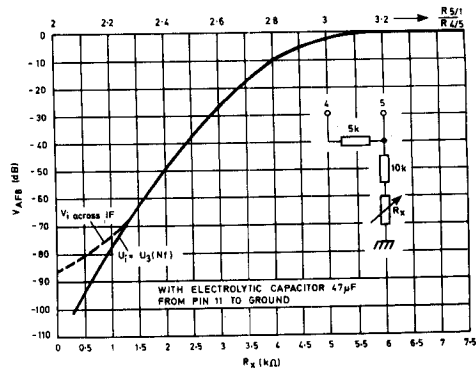


Fig. 11 AF output voltage (pin 8) v. potentiometer resistance and v. ratio of resistances

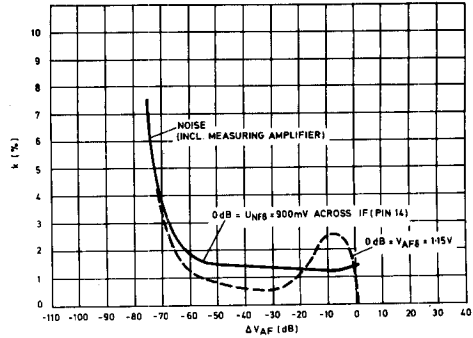


Fig. 10 Harmonic distortion v. volume control

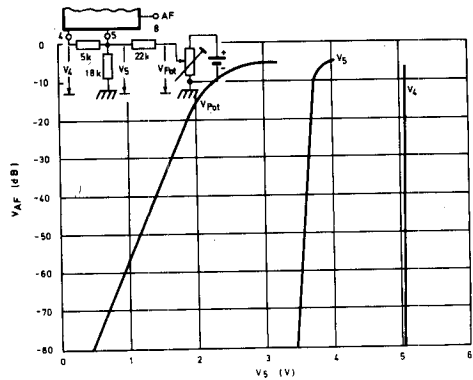


Fig. 12 AF output voltage (pin 8) v. voltage feeding into pin 5

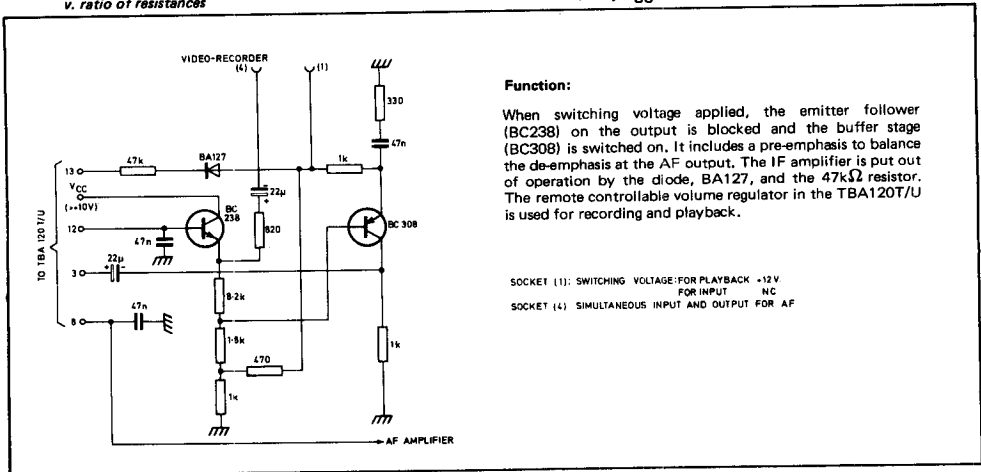


Fig. 13 Circuit for direct connection to video recorders

Function:

When switching voltage applied, the emitter follower (BC238) on the output is blocked and the buffer stage (BC308) is switched on. It includes a pre-emphasis to balance the de-emphasis at the AF output. The IF amplifier is put out of operation by the diode, BA127, and the 47kΩ resistor. The remote controllable volume regulator in the TBA120T/U is used for recording and playback.

- SOCKET (1): SWITCHING VOLTAGE FOR PLAYBACK +12V FOR INPUT NC
- SOCKET (4) SIMULTANEOUS INPUT AND OUTPUT FOR AF