

# FEP30AP THRU FEP30JP


## FAST EFFICIENT PLASTIC RECTIFIER

Reverse Voltage - 50 to 600 Volts

Forward Current - 30.0 Amperes

### FEATURES

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ Dual rectifier construction, positive center-tap
- ◆ Glass passivated chip junctions
- ◆ Superfast recovery times for high efficiency
- ◆ Low forward voltage, high current capability
- ◆ Low thermal resistance
- ◆ Low power loss
- ◆ High temperature soldering guaranteed: 250°C, 0.16" (4.06mm) from case for 10 seconds



### MECHANICAL DATA

**Case:** JEDEC TO-247AD molded plastic body over passivated chips

**Terminals:** Plated leads solderable per MIL-STD-750, Method 2026


**Polarity:** As marked

**Mounting Position:** Any

**Mounting Torque:** 10 in. - lbs. max.

**Weight:** 0.22 ounce, 6.3 grams

### TO-247AD

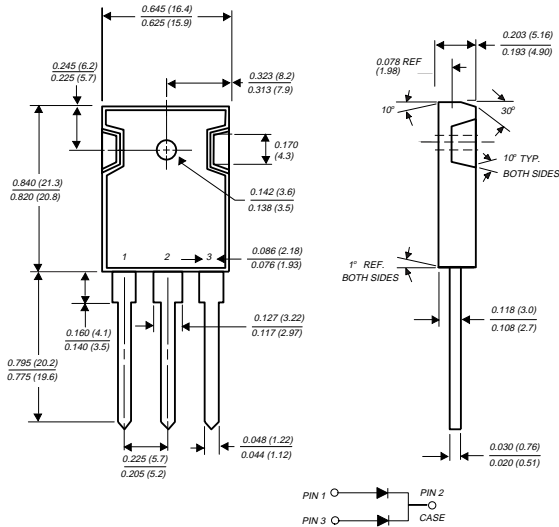

Dimensions in inches and (millimeters)

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.


	SYMBOLS	FEP 30AP	FEP 30BP	FEP 30CP	FEP 30DP	FEP 30FP	FEP 30GP	FEP 30HP	FEP 30JP	UNITS	
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	150	200	300	400	500	600	Volts	
Maximum RMS voltage	$V_{RMS}$	35	70	105	140	210	280	350	420	Volts	
Maximum DC blocking voltage	$V_{DC}$	50	100	150	200	300	400	500	600	Volts	
Maximum average forward rectified current at $T_C=100^\circ\text{C}$	$I_{(AV)}$	30.0								Amps	
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) at $T_C=100^\circ\text{C}$	$I_{FSM}$	300.0								Amps	
Maximum instantaneous forward voltage per leg at 15.0A	$V_F$	0.95			1.3		1.5			Volts	
Maximum DC reverse current at rated DC blocking voltage	$I_R$	$T_C=25^\circ\text{C}$				$T_C=100^\circ\text{C}$					$\mu\text{A}$
Maximum reverse recovery time (NOTE 1) per leg	$t_{rr}$	35.0				50.0				ns	
Typical junction capacitance per leg (NOTE 2)	$C_J$	175.0						145.0		pF	
Typical thermal resistance (NOTE 3)	$R_{\theta JC}$	1.0								$^\circ\text{C}/\text{W}$	
Operating storage and temperature range	$T_J, T_{STG}$	-55 to +150								$^\circ\text{C}$	

#### NOTES:


- Reverse recovery test conditions:  $I_F=0.5\text{A}$ ,  $I_R=1.0\text{A}$ ,  $I_{rr}=0.25\text{A}$
- Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts
- Thermal resistance from junction to case per leg mounted on heatsink

# RATINGS AND CHARACTERISTIC CURVES FEP30AP THRU FEP30JP


**FIG. 1 - FORWARD CURRENT DERATING CURVE**

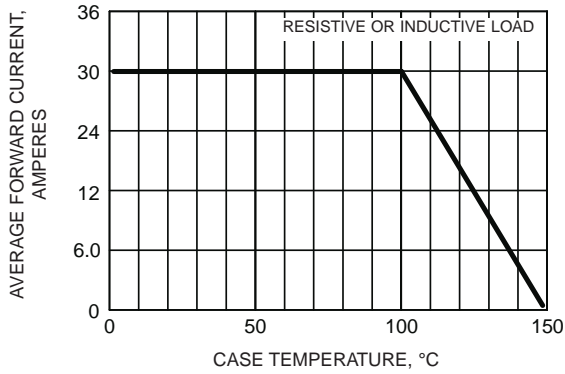


**FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG**

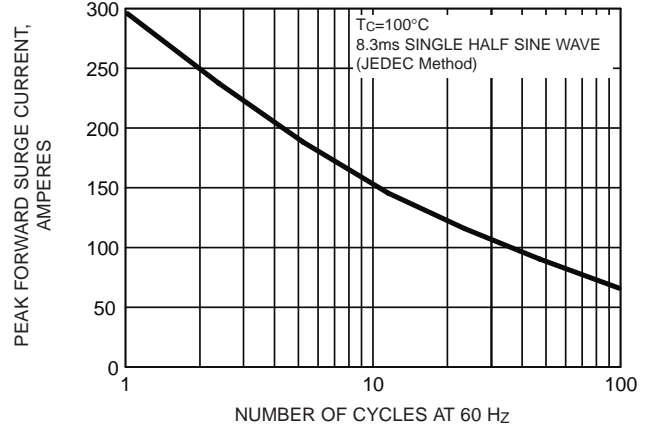


**FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG**

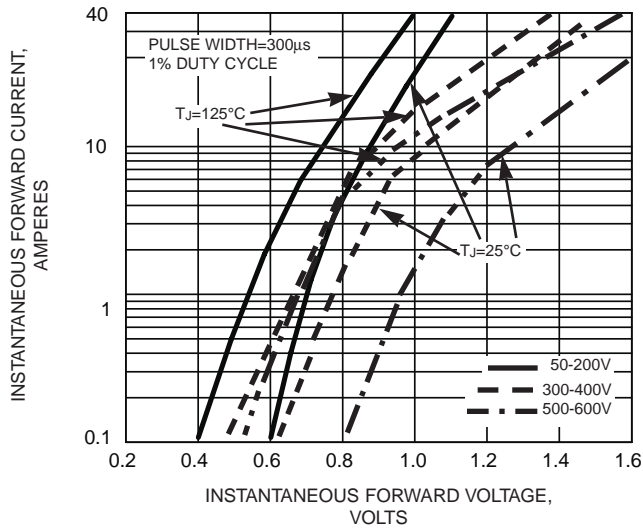

**FIG. 4 - TYPICAL REVERSE CHARACTERISTICS PER LEG**

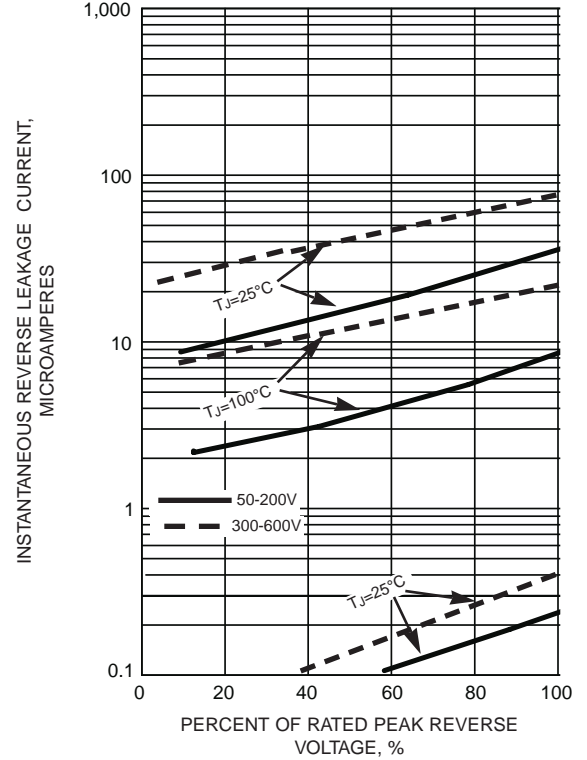

**FIG. 5 - TYPICAL JUNCTION CAPACITANCE**

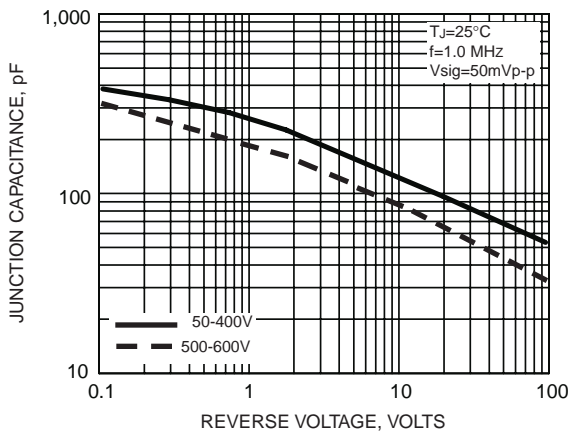

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.