

# MSZ-FD serija

R410A

DC Inverter

TOPLINSKA PUMPA

UNUTRAŠNJA JEDINICA



White



Silver




DALJINSKI UPRAVLJAČ

EER A COP A

Cleaning-free, pipe reuse

PlasmaDuo Filter Systems  
i-see Sensor

VANJSKA JEDINICA

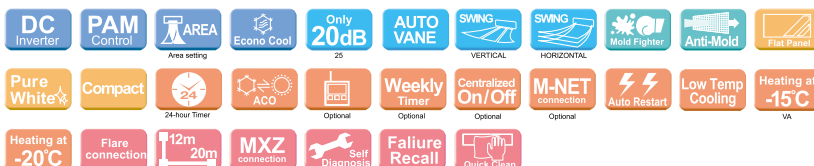

## Tehničke karakteristike

MODEL				INVERTERSKA TOPLINSKA PUMPA						
Naziv modela				MSZ-FD25VA(S)	MUZ-FD25VABH(S)	MSZ-FD35VA(S)	MUZ-FD35VABH(S)	MUZ-FD50VA(S)	MUZ-FD50VABH(S)	
Unutarnja jedinica				MSZ-FD25VA(S)*1	MSZ-FD25VA(S)*1	MSZ-FD35VA(S)*1	MSZ-FD35VA(S)*1	MUZ-FD50VA(S)*1	MUZ-FD50VA(S)*1	
Vanjska jedinica				MUZ-FD25VA	MUZ-FD25VABH	MUZ-FD35VA	MUZ-FD35VABH	MUZ-FD50VA	MUZ-FD50VABH	
Napajanje (Faze, Izvor energije)				230V, 1 ph, 50 Hz, napajanje na vanjsku jedinicu						
Hlađenje	Učinak	Nazivni	kW	2.5	2.5	3.5	3.5	5.0	5.0	
		Min - Max	kW	1.1 - 3.5	1.1 - 3.5	1.1 - 4.0	0.8 - 4.0	1.5 - 5.8	1.5 - 5.8	
	Absorbirana snaga	Nazivna	kW	0.485	0.485	0.85	0.835	1.560	1.510	
		EER		5.15	5.15	4.12	4.19	3.33	3.31	
	SPL	Energetska klasa			A	A	A	A	A	A
		Unutarnja (Low-Mid-High-SH)*2	dB(A)		20 - 29 - 36 - 42	20 - 29 - 36 - 42	21 - 29 - 36 - 43	21 - 29 - 36 - 43	29 - 39 - 45 - 52	29 - 39 - 45 - 52
Količina zraka	Unutarnja (Low-SH)*2	m <sup>3</sup> /min		4.6 - 11.2	4.6 - 11.2	4.6 - 11.2	4.6 - 11.7	6.3 - 14.8	6.3 - 14.8	
	Grijanje	Učinak	Nazivni	kW	3.2	3.2	4.0	4.0	5.8	6.0
Min - Max			kW	1.5 - 5.5	1.5 - 6.3	1.5 - 6.3	1.3 - 6.6	1.5 - 7.8	1.5 - 8.2	
Absorbirana snaga	Nazivna	-15°C	kW	1.5	3.2	1.88	4.0	2.73	6.0	
		COP		0.61	0.600	0.865	0.840	1.610	1.610	
SPL	Energetska klasa			A	A	A	A	A	A	
	Unutarnja (Low-Mid-High-SH)*2	dB(A)		20 - 29 - 36 - 43	20 - 29 - 36 - 43	21 - 29 - 36 - 44	21 - 29 - 36 - 44	27 - 37 - 43 - 50	27 - 37 - 43 - 50	
Količina zraka	Unutarnja (Low-SH)*2	m <sup>3</sup> /min		4.5 - 12.1	4.5 - 12.1	4.7 - 12.5	4.7 - 12.5	5.5 - 14.8	5.5 - 14.8	
	Preporučeni osigurač				A	9.2	10.0	9.2	10.5	16.0
Unutarja	Unos	Nazivni	W	31	31	33	33	60	60	
		Dimenzija		295	295	295	295	295	295	
	Širina	mm		798	798	798	798	798	798	
		Dubina	mm		257	257	257	257	257	257
	Težina	kg		12	12	12	12	12	12	
Vanjska	Dimenzija	Visina	mm	550	550	550	550	850	850	
		Širina	mm	800	800	800	800	840	840	
	Dubina	mm		285	285	285	285	330	330	
		Težina	kg		36	36	36	36	55	55
Cjevovod	Promjer	Plin/tekućina	mm	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52	6.35 / 12.7	6.35 / 12.7	
	Max. dužina/visina	m		20 / 12	20 / 12	20 / 12	20 / 12	30 / 15	30 / 15	
Standardno područje rada (vanjska temperatura)	Hlađenje	°C		-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	
	Grijanje	°C		-15 ~ +24	-25 ~ +24	-15 ~ +24	-25 ~ +24	-15 ~ +24	-25 ~ +24	

\*1MSZ-FD VAS je srebrni model

\*2SHI: Super High

