




- 2SA733 (A)
- 2SA954
- 2SA992
- 2SC945
- 2SC1980

- 2SA850
- 2SC1735

- 2SB686
- 2SD716

- TA7322P

- HA1457W-04

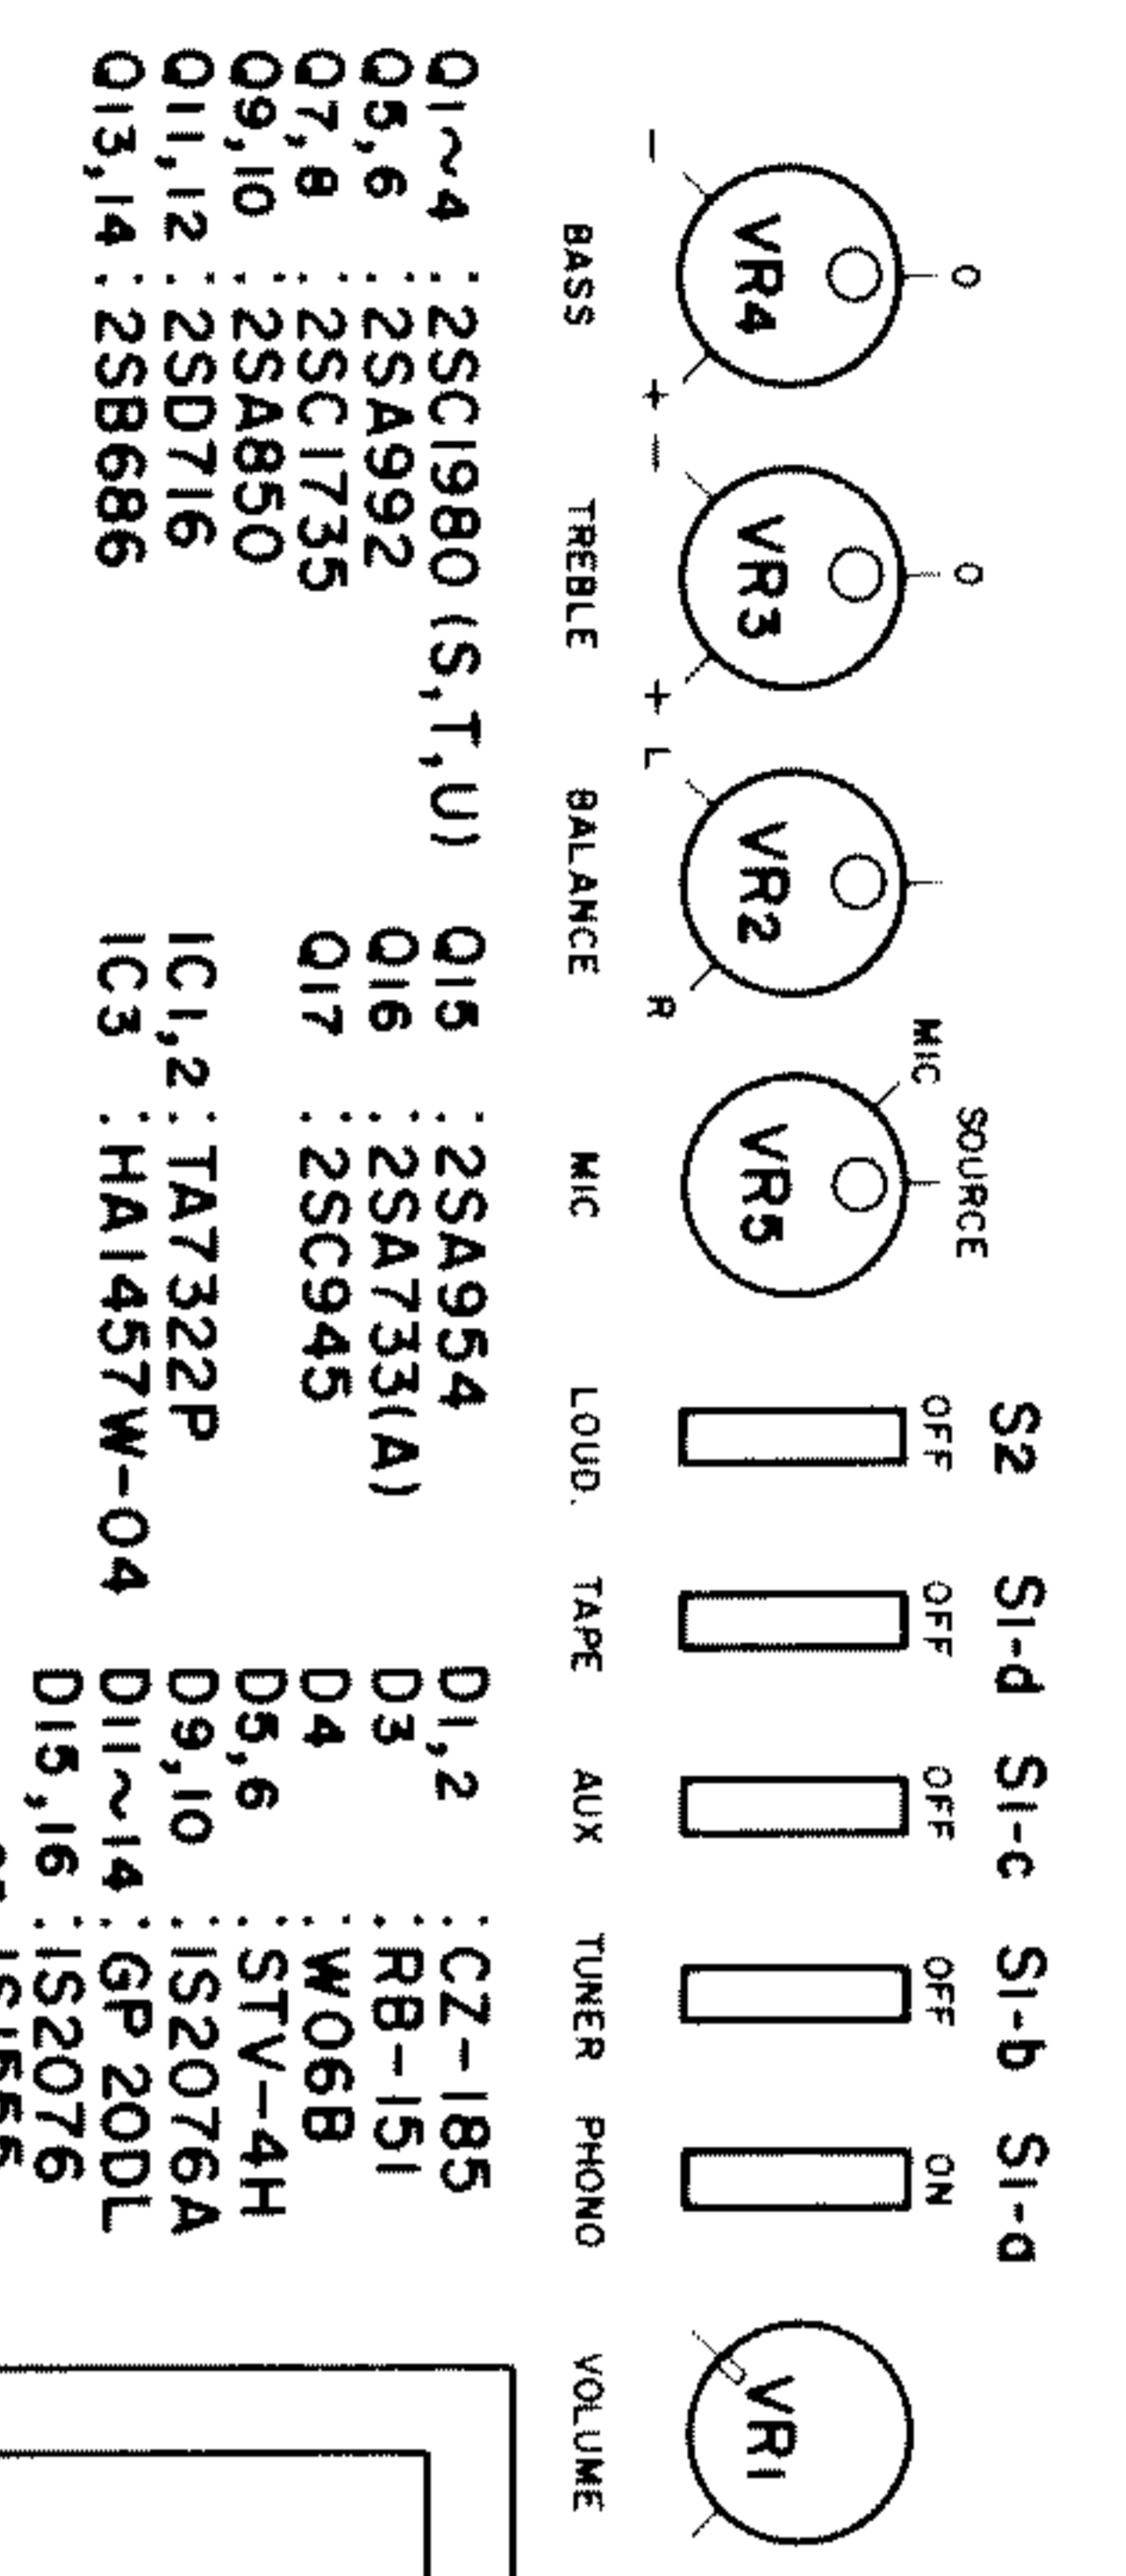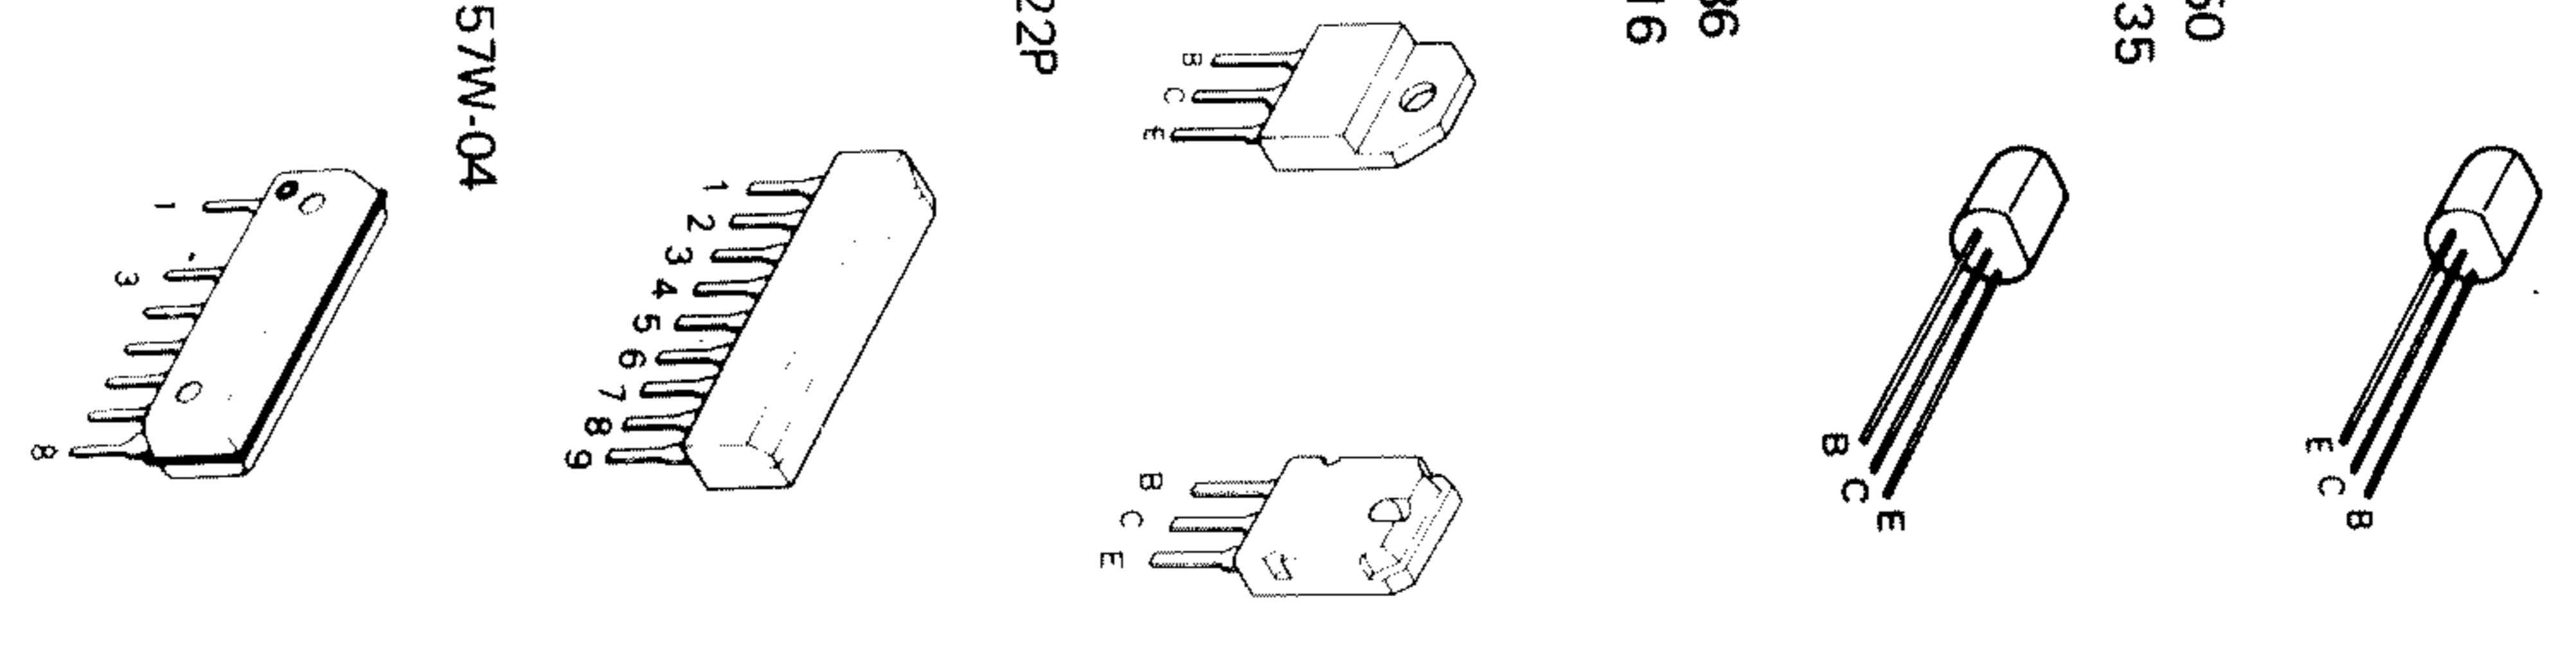


Q1~4 : 2SC1980 (S,T,U)	Q15 : 2SA954	D1,2 : C2-185
Q5,6 : 2SA992	Q16 : 2SA733(A)	D3 : R8-151
Q7,8 : 2SC1735	Q17 : 2SC945	D4 : W068
Q9,10 : 2SA850	IC1,2 : TA7322P	D5,6 : STV-4H
Q11,12 : 2SD716	IC3 : HA1457W-04	D9,10 : IS2076A
Q13,14 : 2SB686		D11~14 : GP 20DL
		D15,16 : IS2076
		or IS1935

IC1~3
D1~4
D5,6 D9,10
D11~16 D4
KA-60 (K)

DC voltages are measured by a
with 20 K Ω /V input impedance.

B C D E F G H

- S2: Sl-d, Sl-c, Sl-b, Sl-d
- 1954: D1, 2: C2-185
- 1733(A): D3: RB-151
- 945: D4: W068
- D5, 6: STV-4H
- D9, 10: IS2076A
- 1A57W-04: D11, 14: GP 20DL
- D15, 16: IS2076 or IS1555

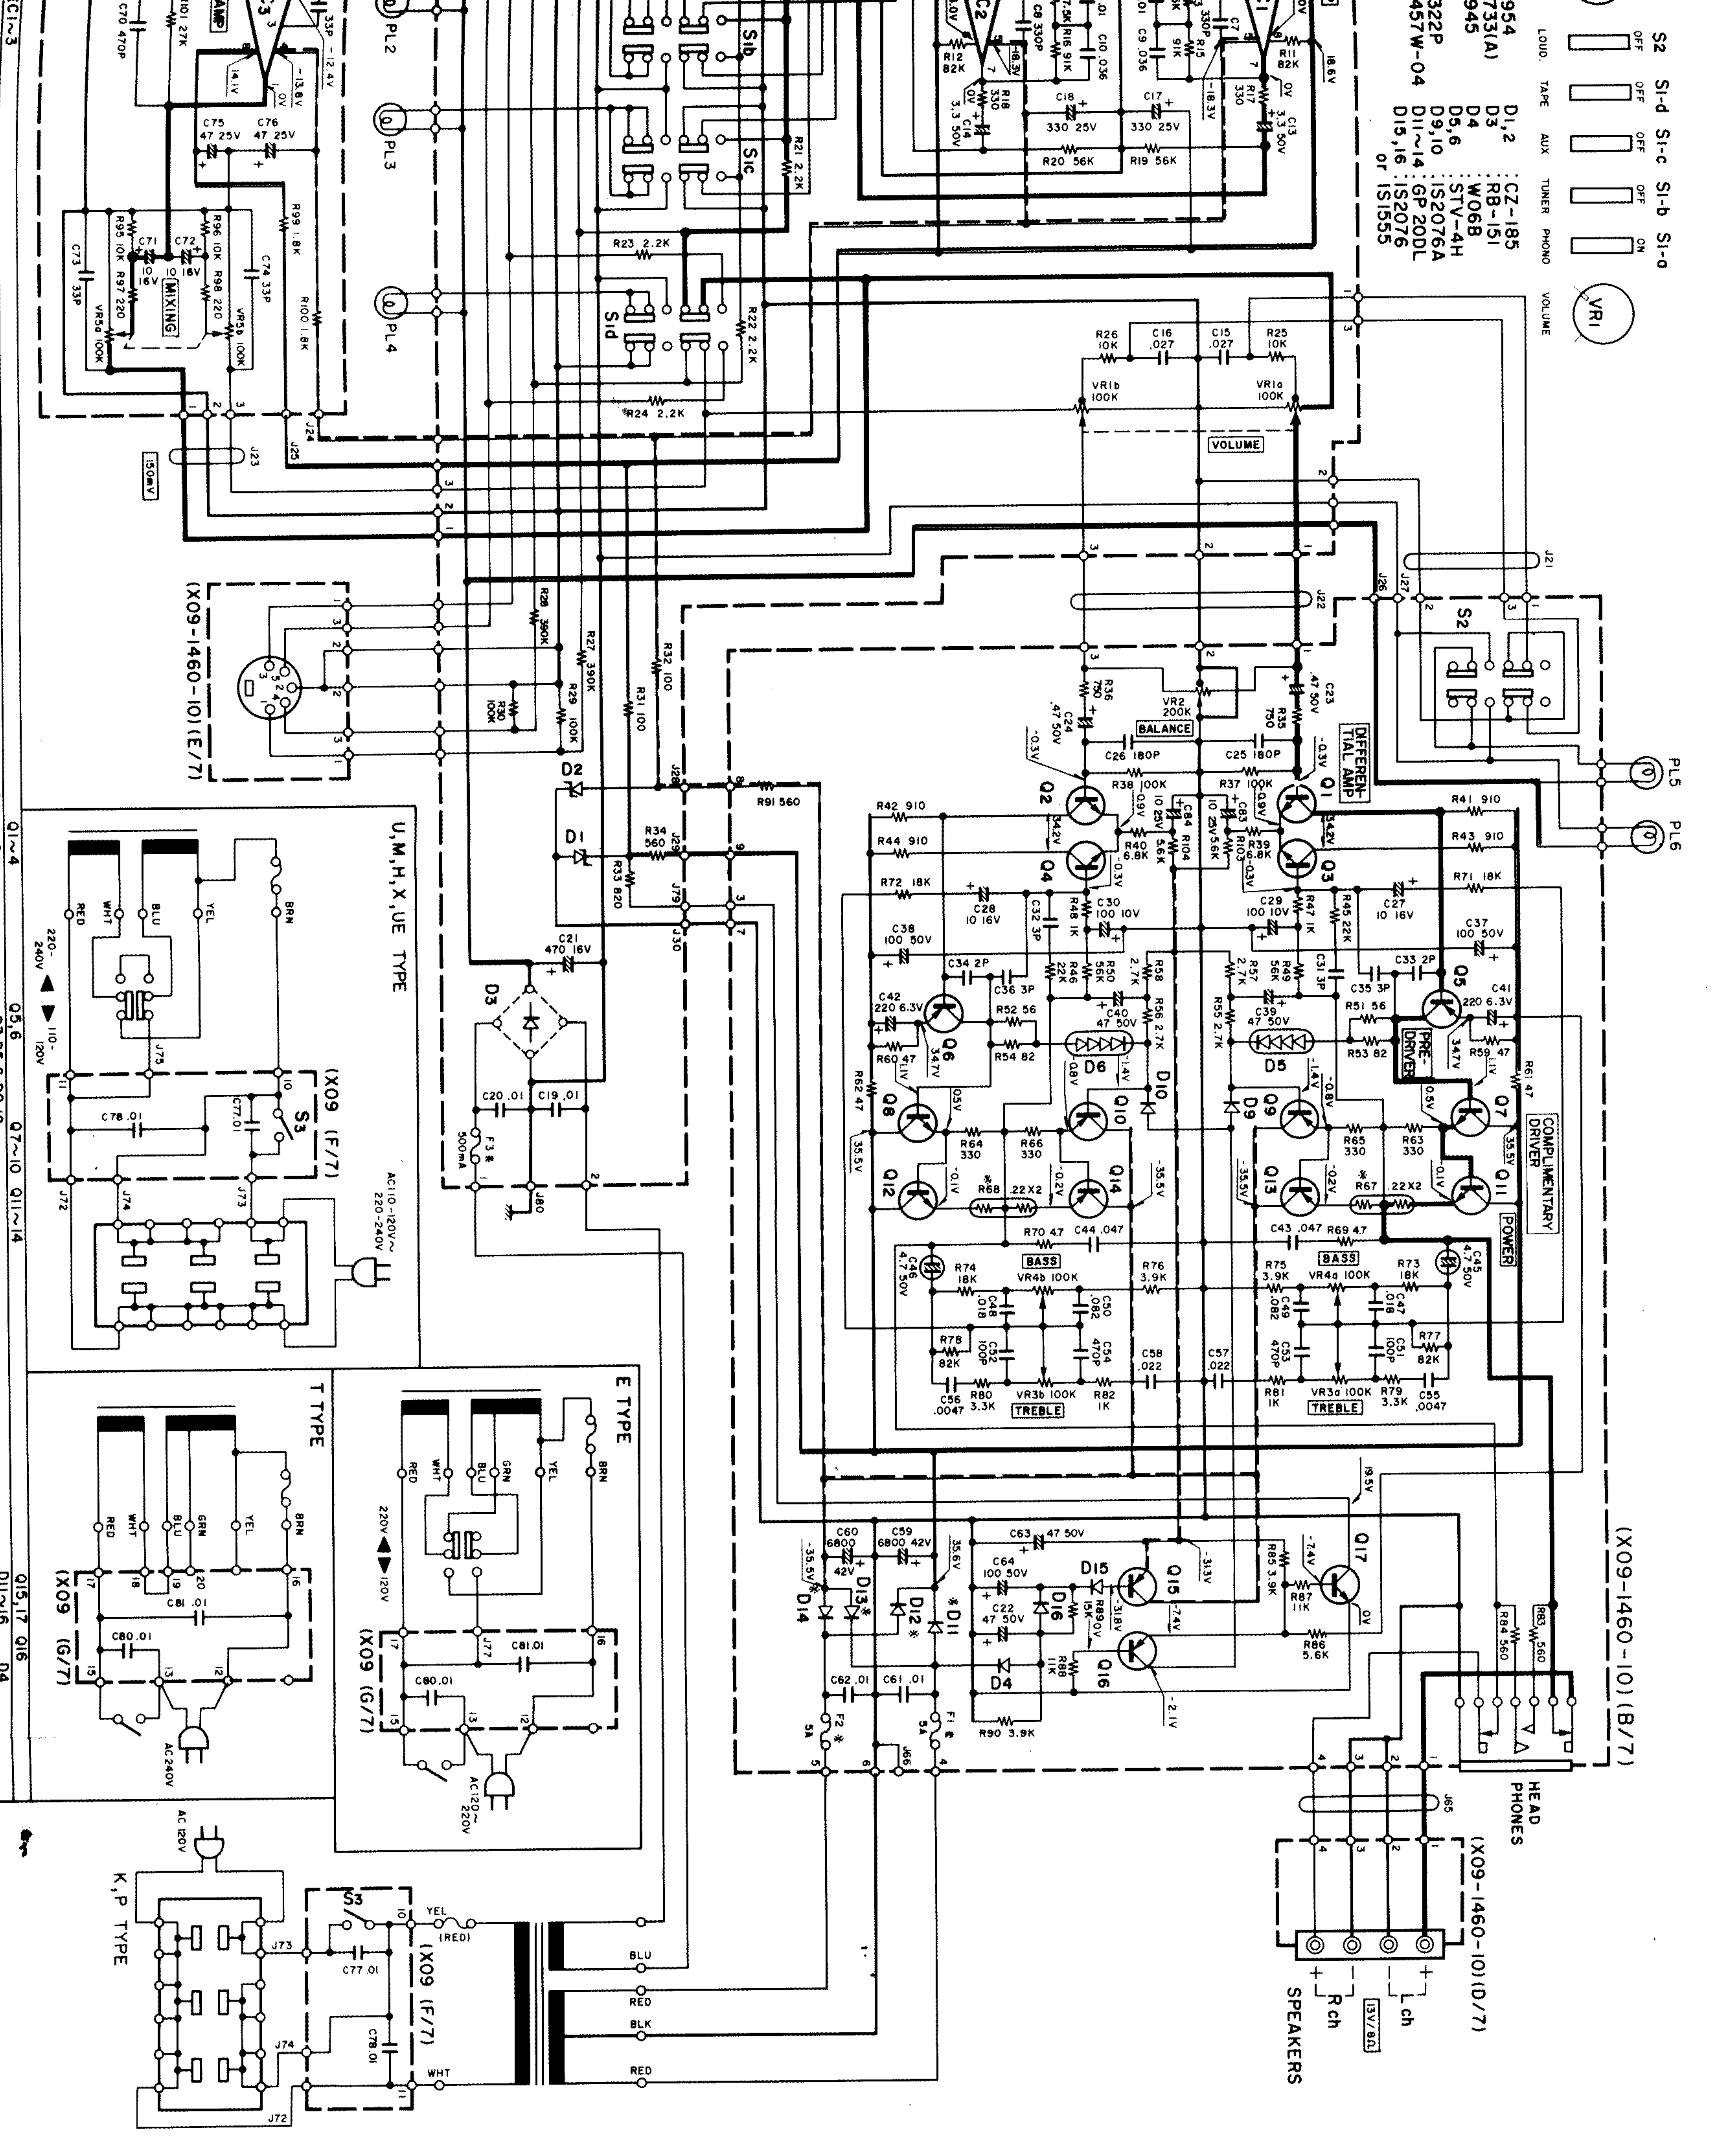

SPECIFICATIONS

Power output: 30 watts* per channel minimum RMS, both channels driven, at 8 ohms from 20 Hz to 20,000 Hz with no more than 0.08% total harmonic distortion.

Both Channels Driven: 32 * 32 watts 8 ohms at 1,000 Hz; 32 * 32 watts 4 ohms at 1,000 Hz

Total Harmonic Distortion (20 Hz to 20,000 Hz): 0.08% at rated power into 8 ohms; 0.04% at 1/2 rated power into 8 ohms; 0.08% at rated power with VOLUME -20 dB; 0.08% at rated power into 8 ohms

PHONO input to SPEAKER output: 40, 20 Hz - 20,000 Hz, into 8 ohms; 10 Hz to 40,000 Hz, at 0.08%, T.H.D. 10 Hz to 100 kHz - 0 dB - 3 dB; Accept 4 ohms to 16 ohms

Damping Factor: 2.5 mV/50 kohms; 150 mV/30 kohms

Frequency Response: 80 dB for 2.5 mV input; 86 dB for 5.0 mV input; 92 dB for 10 mV input; 100 dB for 150 mV input; 73 dB for 2.5 mV input; 180 mV/(RMS); T.H.D. 0.08% at 1,000 Hz; 150 mV/330 ohms; 30 mV/75 kohms; RIAA standard curve ± 0.4 dB; (30 Hz to 15,000 Hz)

Phono Frequency Response: ± 10 dB at 100 Hz; ± 10 dB at 10 kHz; -9 dB at 100 Hz for -30 dB VOLUME level

Tone Control: Bass: 10 dB at 100 Hz; Treble: 10 dB at 10 kHz

Loudness Control: -9 dB at 100 Hz for -30 dB VOLUME level

GENERAL: 60 Hz, 120 V, U.S.A. & Canada Model; 50/60 Hz; 1.0, 1.20 V 220-240 V, switchable; 70 W (RMS) (CSA); 60 W (RMS) (CSA); 20 W, 180 signal; Switched 2 Unswitched 1; W 440 mm (17.10 32.7); H 78 mm (3.2 32.1); D 338 mm (13.10 32.1); 5.5 kg (12.1 lbs)

A.C. Outlet: Dimensions: Weight:

Kenwood follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.

Kenwood strebt ständige Verbesserungen in der Entwicklung an. Daher bleiben Änderungen der technischen Daten jederzeit vorbehalten.

Kenwood poursuit une politique de progrès constants en ce qui concerne le développement. Pour cette raison, les spécifications sont sujettes à modifications sans préavis.

DC voltages are measured by a VOM with 20 kΩ/V input impedance.