

PLUTO

Safety PLC system

Type: Pluto S46-6

Batch no: 01-23007

Art. no.: 20-070-16

EN 954-1, Category 4

EN 61491-1, Type 4

EN 574, Type III

Supply voltage:

24 VDC, +/- 15 %

Output:

Q0, Q1, Q4, Q5: 250V 1,5A

Q2, Q3: -24VDC, 800 mA

Q10...Q17: +24VDC, 800 mA Tot. 2A

Q20...Q27: +24VDC, 800 mA Tot. 2A



2007016
0123007

0049

846-0428



7 350024 430412

JOKAB SAFETY

Made in Sweden

www.jokab-safety.com

PLUTO S46-6

서비스 센터



서보시스템

서보시스템

PLUTO S40-6

K

=07-A113

SAFETY

I1 I3 I6 IQ10 IQ12 IQ15 IQ17 IQ21 IQ24 IQ26 Q2
I5 IQ11 IQ13 IQ14 IQ16 IQ20 IQ22 IQ25 IQ27 Q3
I30 I32 I34 I36 I37 I41 I43 I45 I46 ID 0V 0L 1L 4L Q5
I31 I33 I35 I40 I42 I44 I47 0V 24V Q0 Q1 Q4



서보시스템


서보

서보시스템

EMAX-V20071212-SPS

17.6.2008

서보시스텍

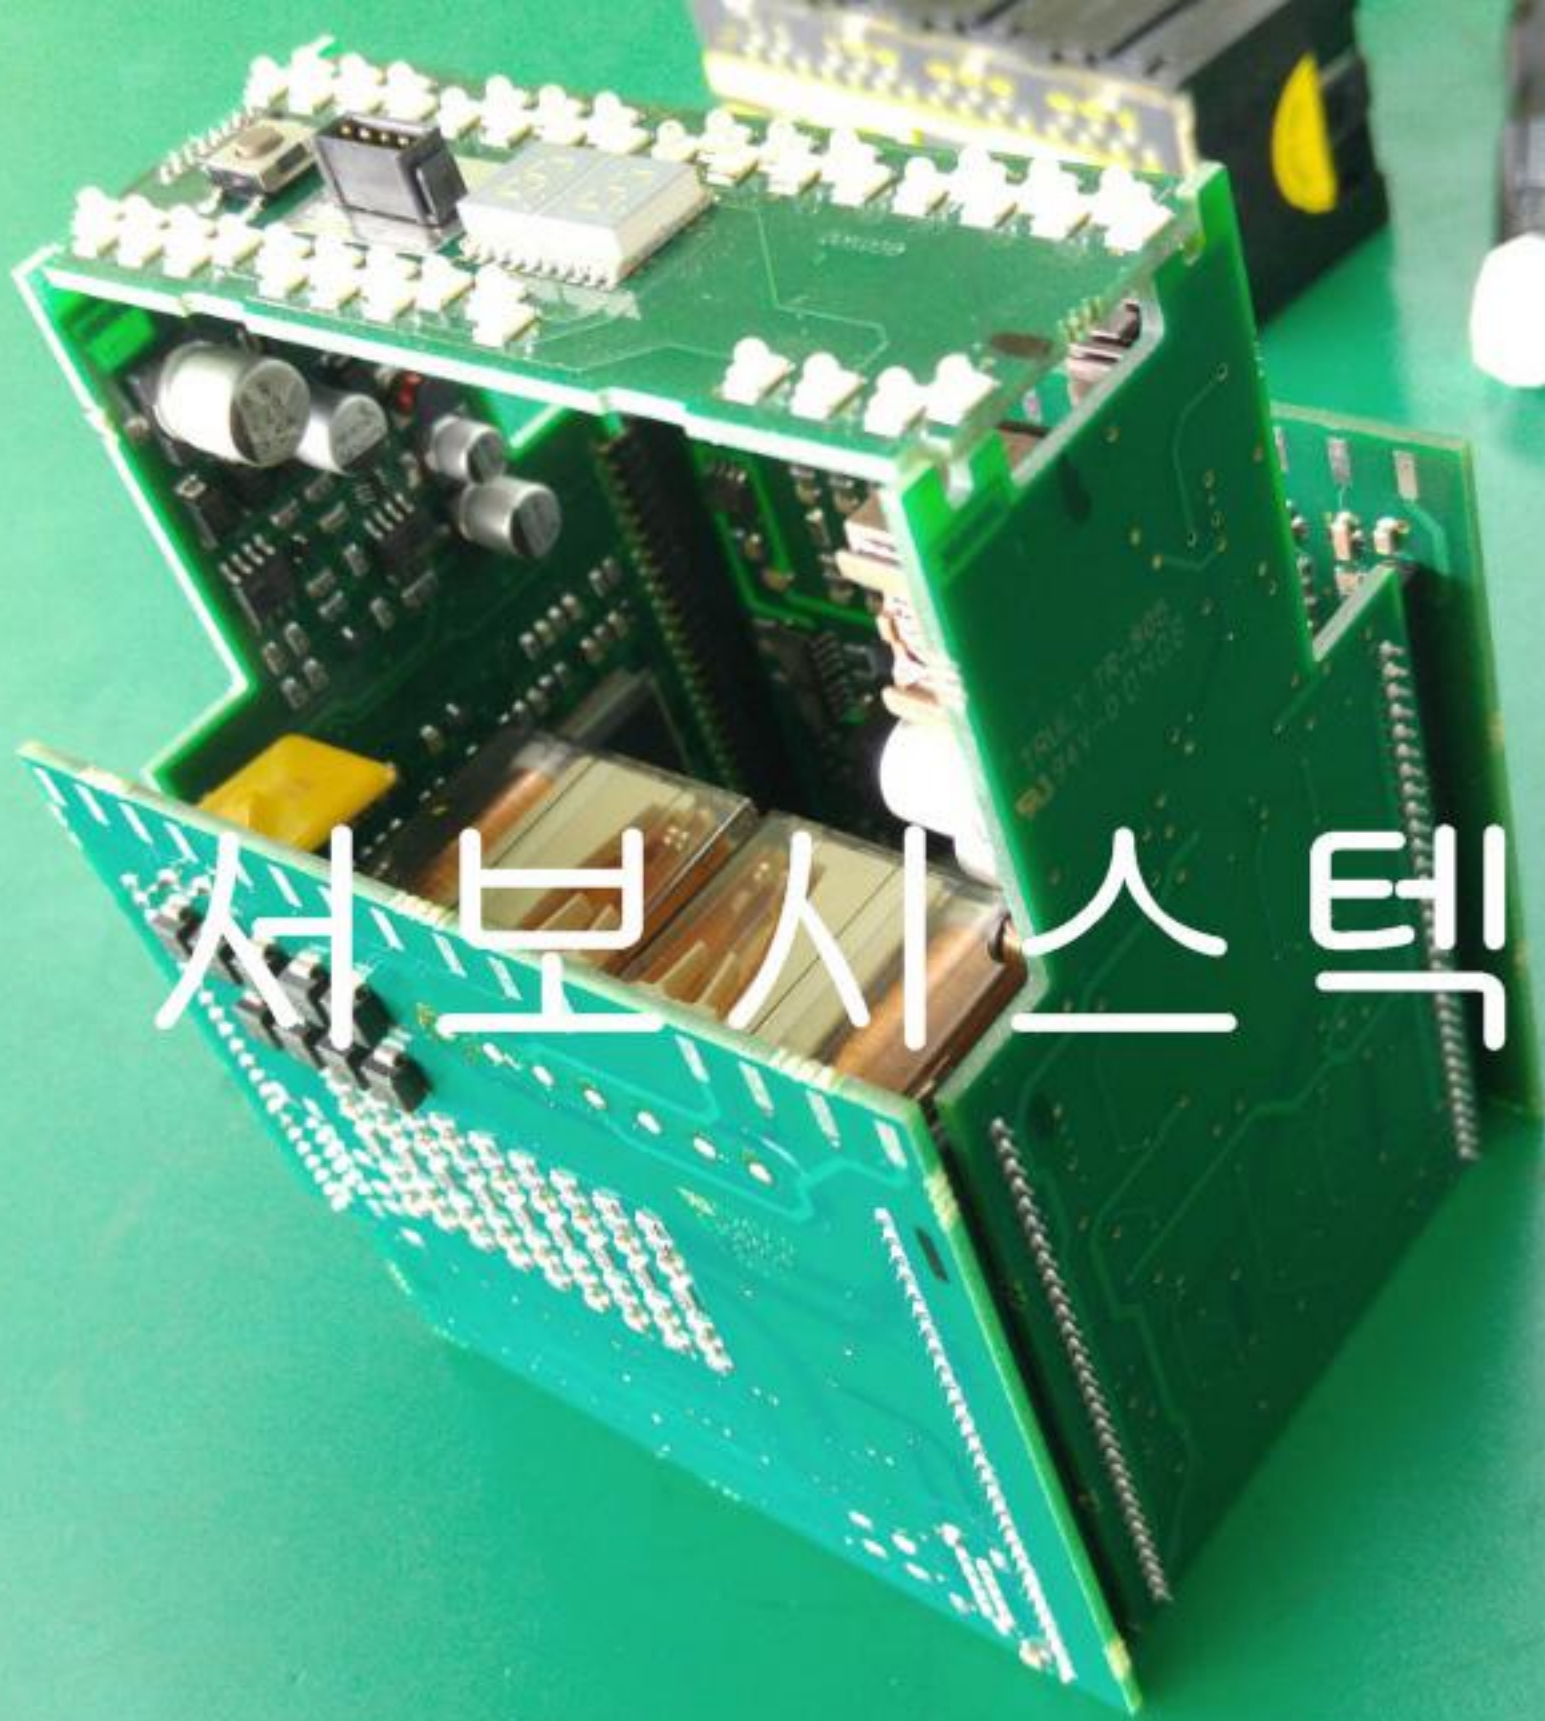


서보시스템



서보시스터익



서보시스템

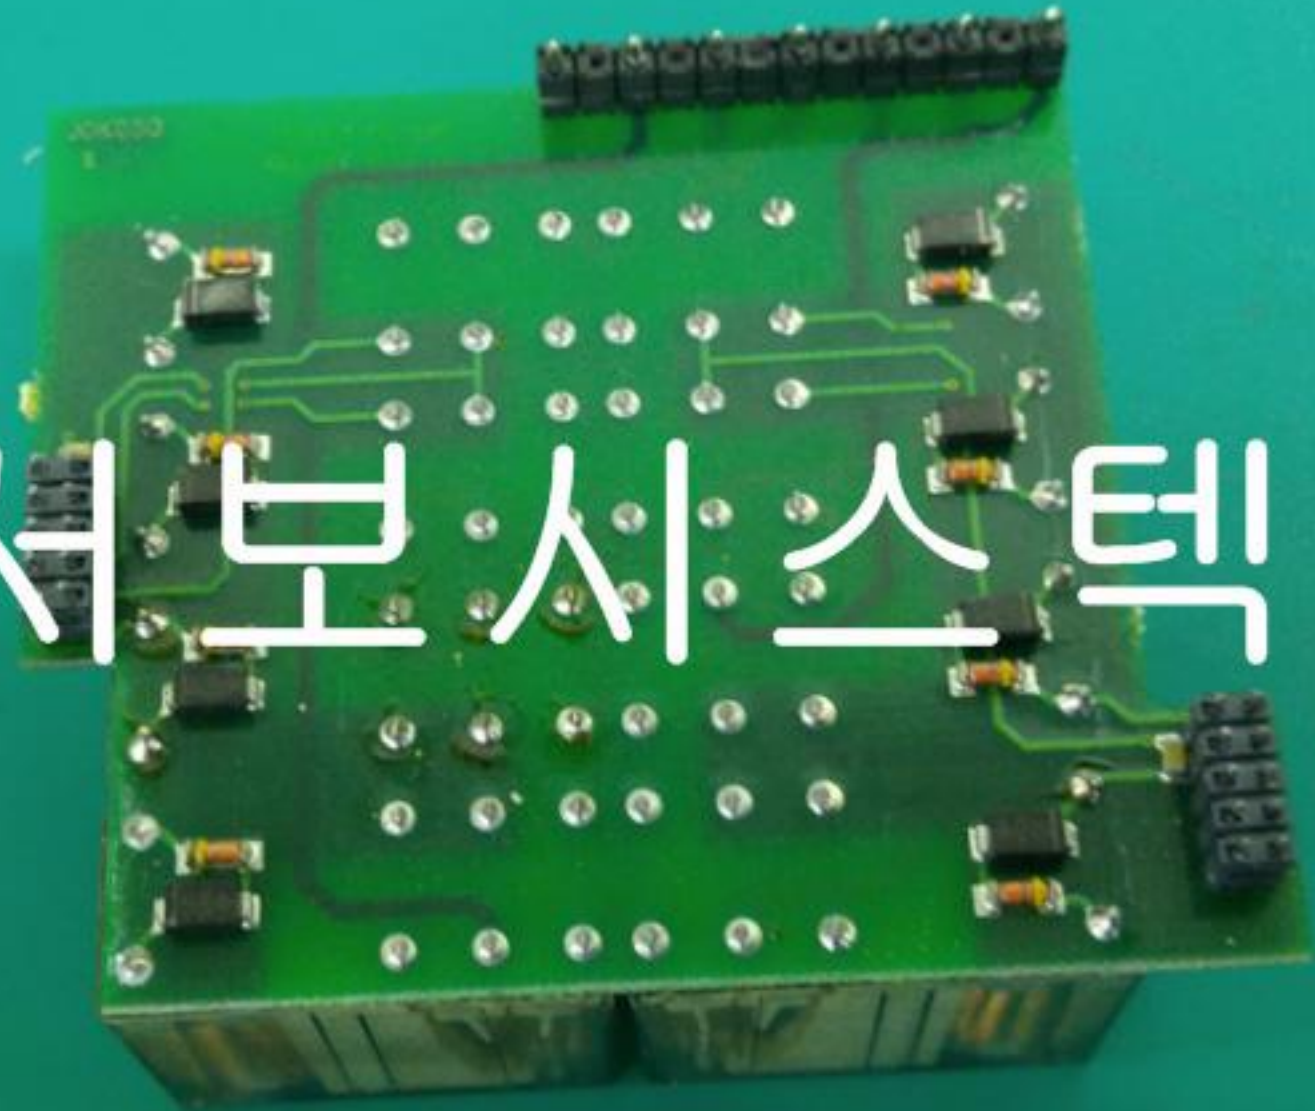



서보사스텍

서보시스템



固件烧录





BIHM77-12003LF

BIHM77-12003LF
0751 CHINA

BIHM77-12003LF
0751 CHINA

6.0
470
1.6A

6.0
470
1.6A

7.9
220
3.5A

7.9
220
3.5A

7.9
220
3.5A

7.9
220
3.5A

7.9
220
3.5A

7.9
220
3.5A

7.9
220
3.5A

7.9
220
3.5A

7.9
220
3.5A

7.9
220
3.5A

7.9
220
3.5A

7.9
220
3.5A

7415
1334L

7415
1334L

7415
1334L

7415
1334L

7415
1334L

7415
1334L

BIHM77-12003LF