




Complex permeability
versus frequency
(measured with R14 ring cores, $\hat{B} \leq 0,25$ mT)

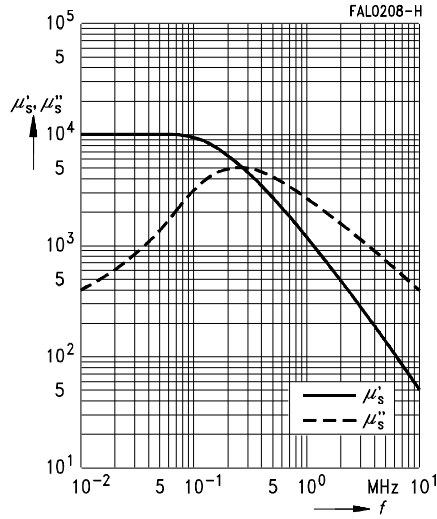


Initial permeability μ_i
versus temperature
(measured with R16 ring cores, $\hat{B} \leq 0,25$ mT)

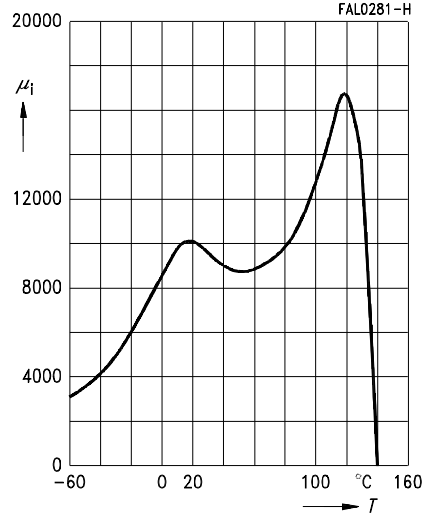


Variation of initial permeability
with temperature
(measured with R16 ring cores, $\hat{B} \leq 0,25$ mT)

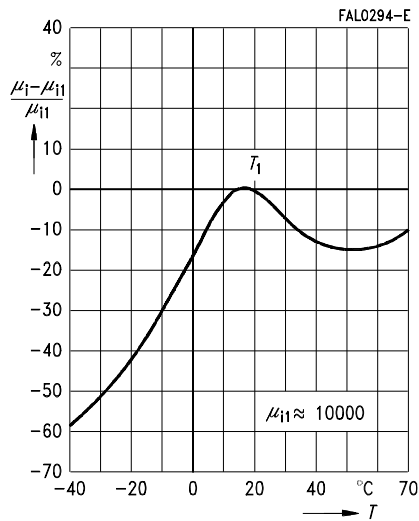


Relative loss factor
versus frequency
(measured with R14 ring cores, $\hat{B} \leq 0,25$ mT)

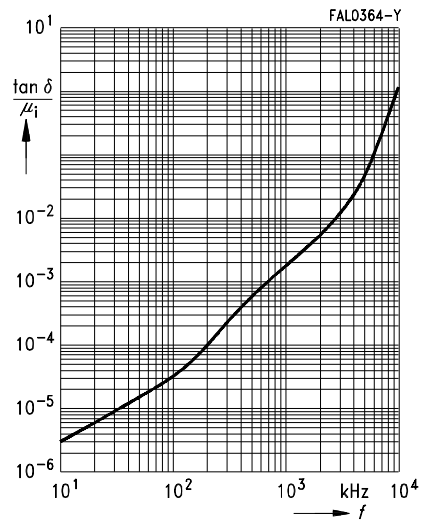

Dynamic magnetization curves
(typical values)
($f = 10 \text{ kHz}$, $T = 25 \text{ }^\circ\text{C}$)

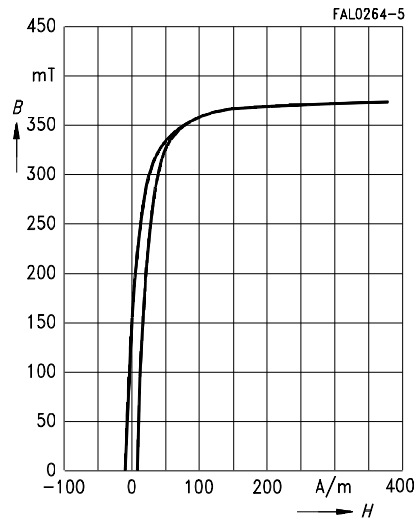

Dynamic magnetization curves
(typical values)
($f = 10 \text{ kHz}$, $T = 100 \text{ }^\circ\text{C}$)

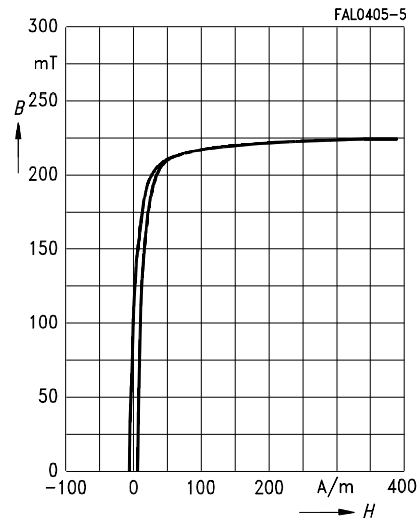

DC magnetic bias of RM cores
(typical values)
($\dot{B} \leq 0,25 \text{ mT}$, $f = 10 \text{ kHz}$, $T = 25 \text{ }^\circ\text{C}$)

