

WOOFER

LF15X401

Professional Low Frequency Transducer


Very linear frequency response characteristics, extreme high power handling while generating the lowest harmonic distortion of any comparable 18-inch transducer within its application range. The LF15X401 uses a fibre loaded cone assembly along with a high excursion triple roll surround. This combination provides remarkable strength and a peak to peak maximum excursion of 50 mm. The new dual forced hyper-venting system guarantee a very efficient voice coil ventilation for minimum power compression and incredible power handling.




PART NUMBER 11100090

- 4.0 - inch, fibreglass inside-outside copper voice coil
- 3000 Watt continuous program power handling
- 96.5 dB Sensitivity
- 30 Hz - 1.5 kHz Frequency range
- 26.5 T/m BL
- 50 mm peak-to-peak excursion
- Dual-forced hyper-venting and 15mm top plate for minimum power compression
- Dual spider design with silicon based dampening control
- Triple-roll surround and corrugated straight cone geometry


APPLICATIONS

The LF15X401 is ideal for use in applications where sizable amounts of low frequency, long excursion and low distortion acoustic power is desired. The robust mechanical design and optimised weight of the device make it desirable for use in fixed installation or touring professional loudspeaker systems. The transducer's low frequency extension, coupled with its extremely low generation of harmonic distortion, also makes it ideal for use within critical listening applications such as studio monitoring subwoofer systems.

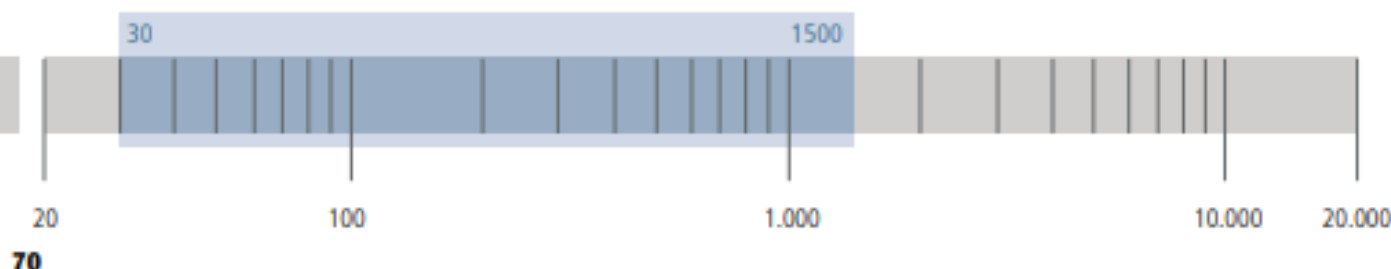

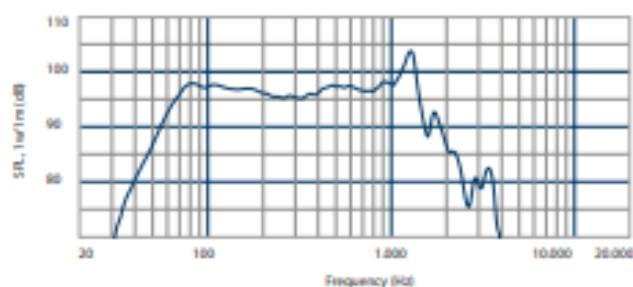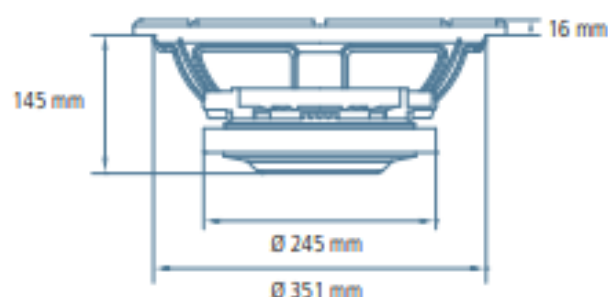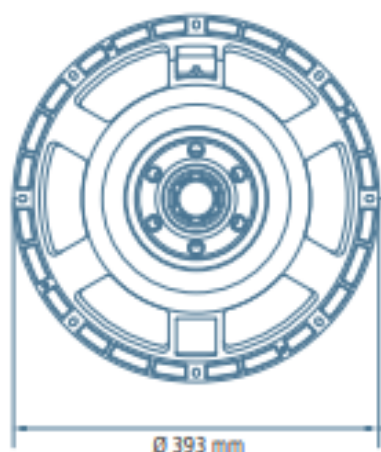

Frequency response curve of the loudspeaker made in a hemispherical, free field and mounted in a reflex box with an internal volume of 55 liters and tuned at 60Hz, applying a sinusoidal signal of 2.83 V @ 8Ω at 1m.

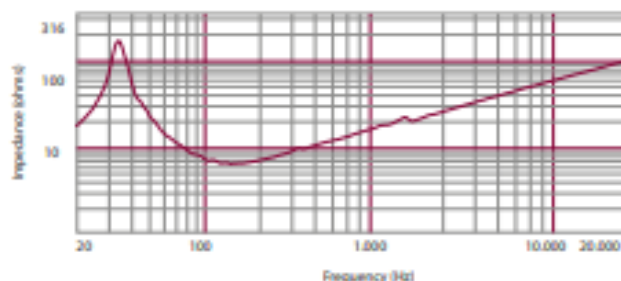

Impedance magnitude curve measured in free air

GENERAL SPECIFICATIONS

Nominal Diameter	15 / 381	inch / mm
Rated Impedance	8	ohm
Program Power ¹	3000	Watt
Power handling capacity ²	1500	Watt
Sensitivity ³	96.5	dB
Frequency Range	30 - 1500	Hz
Effective Piston Diameter	340 / 13.39	mm / inch
Max Excursion Before Damage (peak to peak)	50 / 1.97	mm / inch
Minimum Impedance	6.5	ohm
Voice Coil Diameter	4 / 102	inch / mm
Voice Coil Material	Copper	
Voice Coil Winding Depth	30 / 1.18	mm / inch
Number of layers	2	
Kind of layer	inside/outside	
Top Plate Thickness	15 / 0.59	mm / inch
Cone Material	No pressed pulp	
Cone Design	Straight	
Surround Material	Polycotton	
Surround Design	Triple roll	
Magnets Material	Ceramic	

THIELE - SMALL PARAMETERS ⁴

Resonance frequency	Fs	34	Hz
DC resistance	Re	5.5	ohm
Mechanical factor	Qms	7.6	
Electrical factor	Qes	0.30	
Total factor	Qts	0.29	
BL Factor	BL	26.5	T · m
Effective Moving Mass	Mms	170	gr
Equivalent Cas air load	Vas	146	liters
Effective piston area	Sd	0.091	m ²
Max. linear excursion (mathematical) ⁵	Xmax	11.5	mm
Voice - coil inductance @ 1KHz	Le1K	1.3	mH
Half-space efficiency	Eff	1.90	%

MOUNTING INFORMATION

Overall Diameter	393 / 15.47	mm / inch
Bolt Circle Diameter	371-376 / 14.6-14.8	mm / inch
Bolt Hole Diameter	6.5 / 0.25	mm / inch
Front Mount Baffle Cut-out	354 / 13.94	mm / inch
Rear Mount Baffle Cut-out	354 / 13.94	mm / inch
Depth	145 / 5.70	mm / inch
Volume occupied by the driver ⁶	4.3 / 0.17	liters / ft ³

SHIPPING INFORMATION

Net Weight	12 / 26.46	Kg / Lbs
Shipping Weight	13.5 / 29.76	Kg / Lbs

NOTES TO SPECIFICATIONS

1. Program Power is defined as 3 dB greater than AES power.
2. AES standard.
3. Sensitivity measurement is based on a 500-2,5 kHz pink noise signal with input power of 2.83V @ 8 Ohms.

4. Thiele-Small parameters are measured after a 2 hour warm up period running the loudspeaker at full power handling capacity.
5. The maximum linear excursion is calculated as: $(V_{vc} - H_g)/2 + H_g/4$ where V_{vc} is the voice coil depth and H_g the gap depth.
6. Calculated for front mounting on 18 mm thick board.