

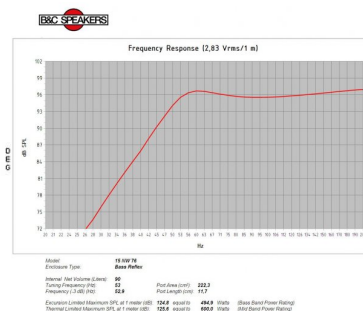


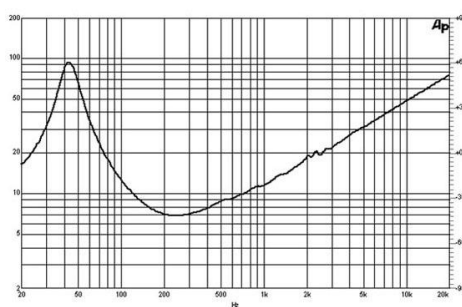

1200 W continuous program power capacity  
 76 mm (3 in) copper voice coil  
 40 - 2000 Hz response  
 100.5 dB sensitivity  
 Aluminium demodulating ring allows a very low distortion figure  
 Neodymium ring magnet assembly  
 Double silicone spider and ventilated voice coil gap

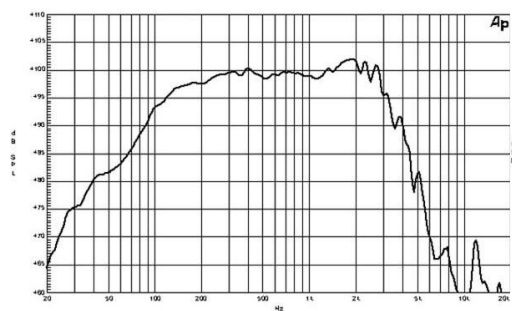

**SPECIFICATIONS**

Nominal Diameter	380 mm (15 in)
Nominal Impedance	8 Ω
Minimum Impedance	6.9 Ω
Nominal Power Handling	600 W 2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.
Continuous Power Handling	1200 W Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
Sensitivity	100.5 dB Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
Frequency Range	40 Hz - 2000 Hz
Voice Coil Diameter	76 mm (3 in)
Winding Material	Copper
Former Material	Glass Fibre
Winding Depth	19 mm (0.75 in)
Magnetic Gap Depth	11 mm (0.43 in)
Flux Density	1.3 T
Woofer Cone Treatment	TWP Waterproof Both Sides

**PARAMETERS**

Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.

Fs	42 Hz
Re	5.3 Ω
Qes	0.23
Qms	4.3
Qts	0.22
Vas	130 dm <sup>3</sup> (4.5 ft <sup>3</sup> )
Sd	855 cm <sup>2</sup> (132.5 sq <sup>2</sup> )
η0	4.4 %
Xmax	8 mm
Xvar	10 mm
Mms	104 g
Bl	25.5 Tm
Le	1.25 mH
EBP	183 Hz

**DESIGN**

Surround Shape	Triple Roll
Cone Shape	Exponential
Magnet Material	Neodymium Ring
Spider	Double Silicone
Pole Design	T-Pole
Woofer Cone Treatment	TWP Waterproof Both Sides
Recommended Enclosure	90 dm <sup>3</sup> (3.18 ft <sup>3</sup> )
Recommended Tuning	53 Hz

**MOUNTING AND SHIPPING INFO**

Overall Diameter	393 mm (15.5 in)
Bolt Circle Diameter	374 mm (14.7 in)
Baffle Cutout Diameter	354 mm (13.9 in)
Depth	177 mm (7 in)
Flange and Gasket Thickness	16 mm (0.62 in)
Air Volume Occupied by Driver	3.7 dm <sup>3</sup> (0.13 ft <sup>3</sup> )
Net Weight	5.6 kg (12.3 lb)
Shipping Units	1 pcs
Shipping Weight	6.9 kg (15.21 lb)
Shipping Box	425x425x224 mm (16.73x16.73x8.82 in)

**SERVICE KITS**

LF recone-kits	RCK15NW768
----------------	------------