■ RX-496RDS SCHEMATIC DIAGRAM (INPUT)

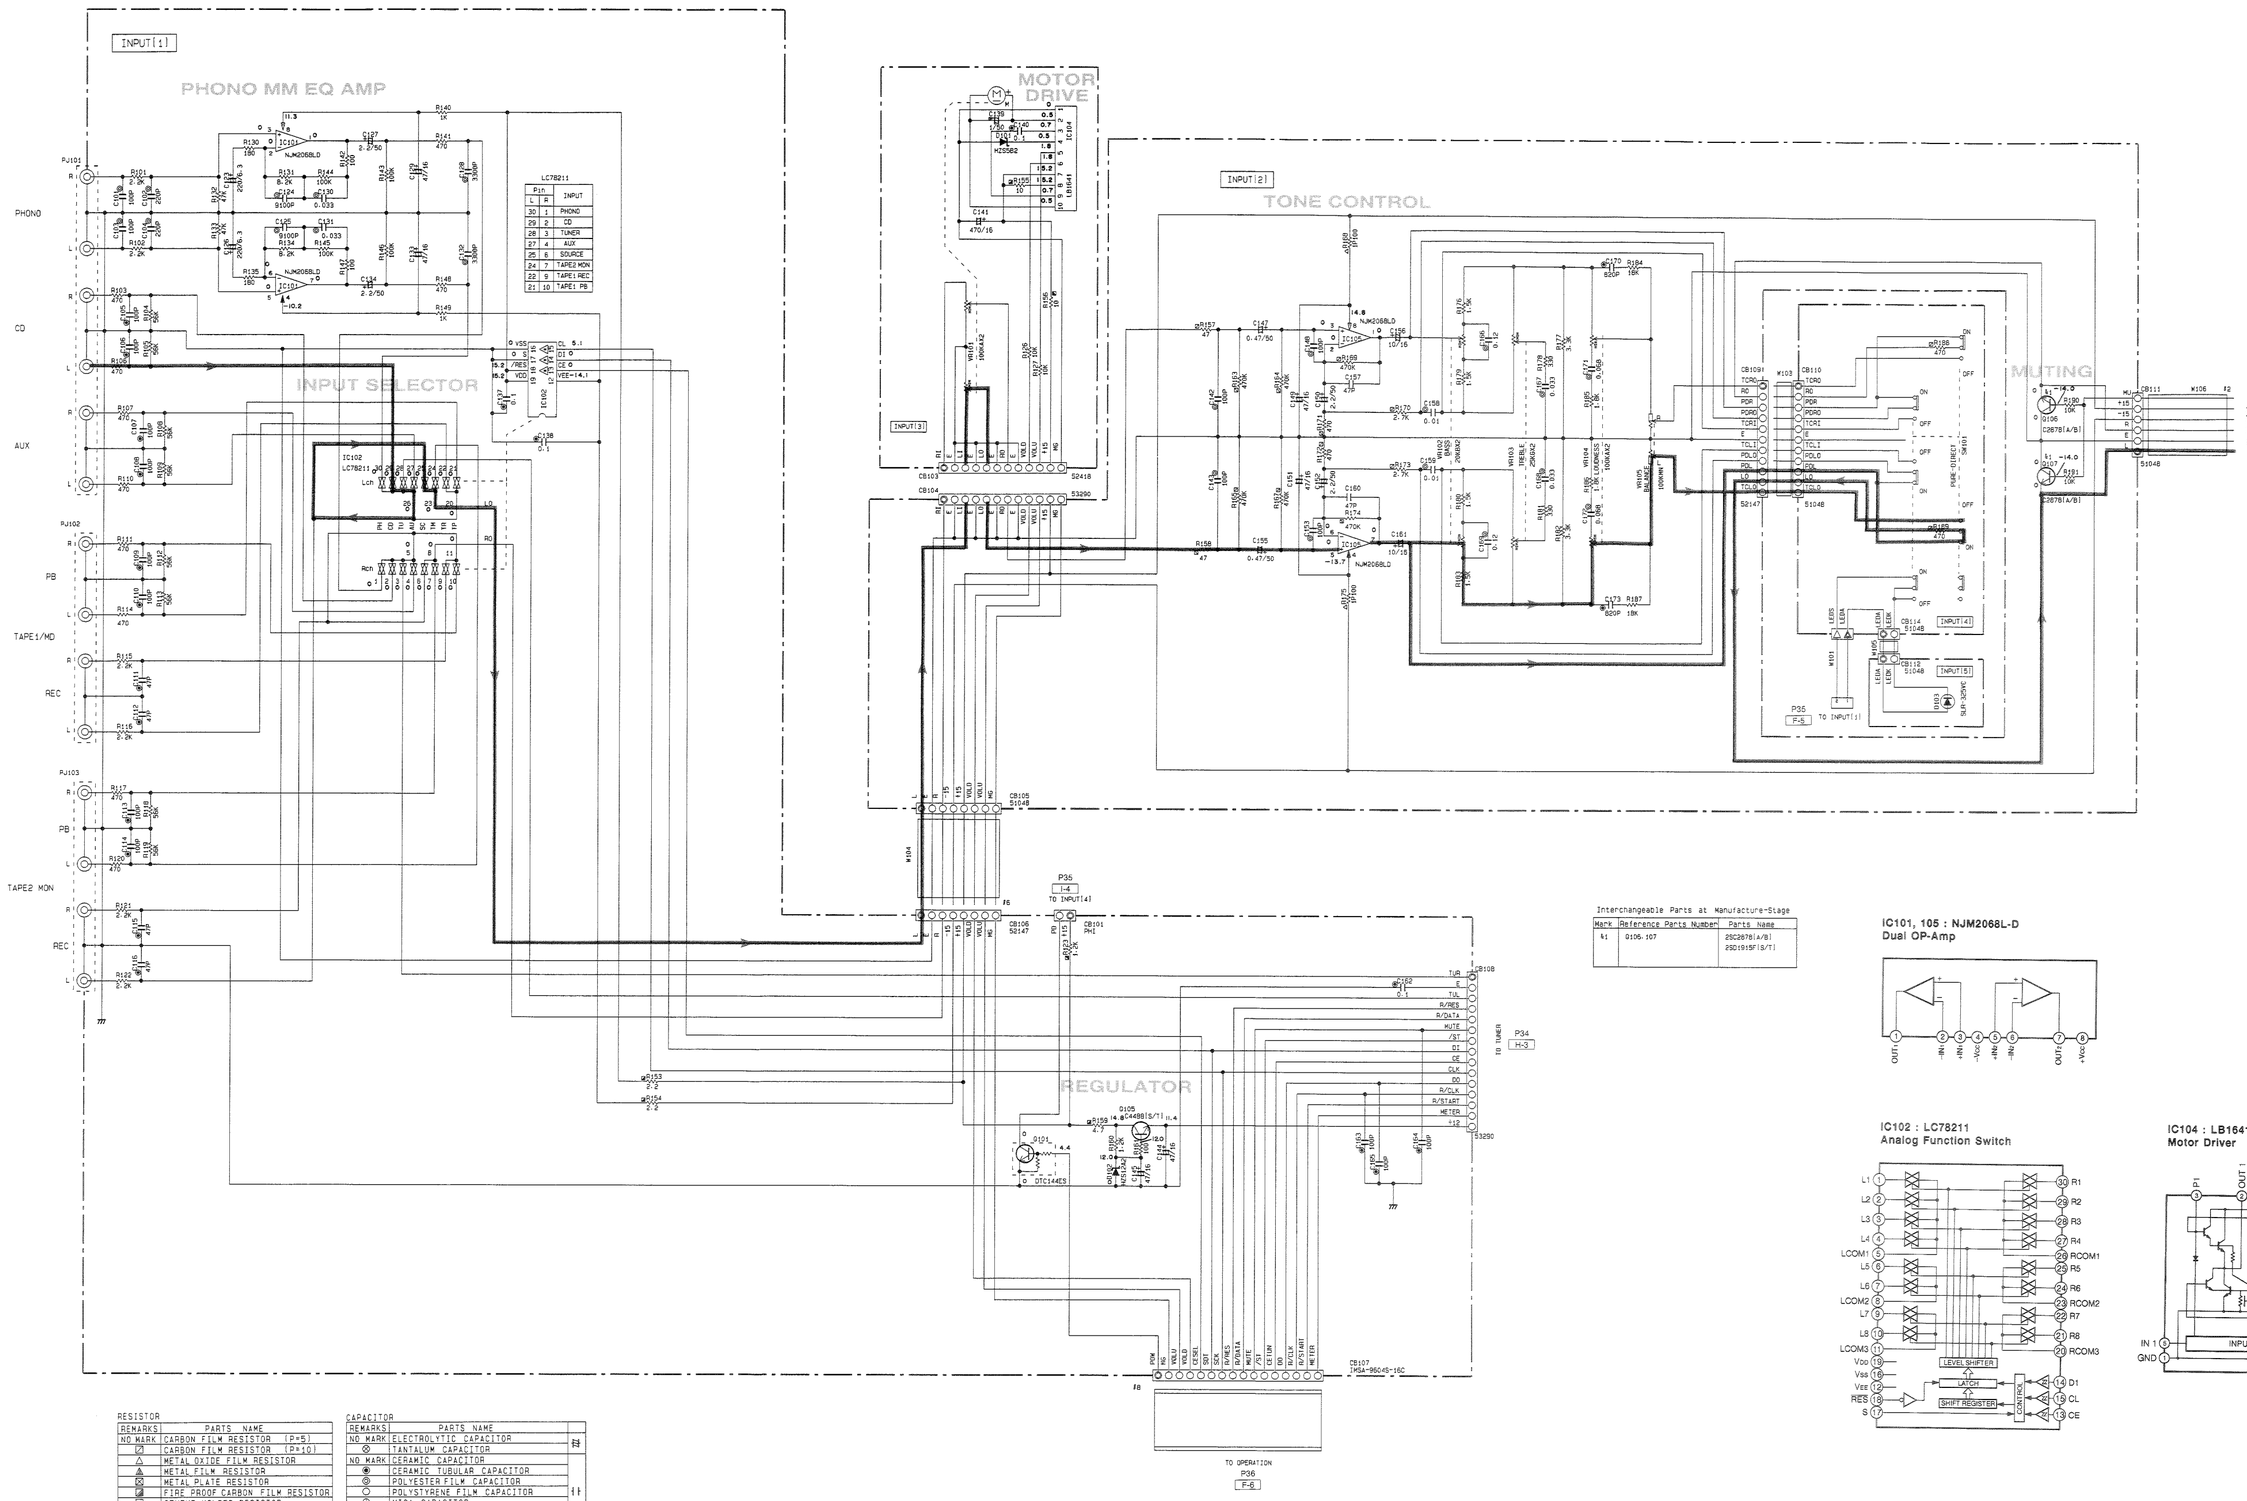

Pin		
L	R	INPUT
30	1	PHONO
29	2	CD
28	3	TUNER
27	4	AUX
25	6	SOURCE
24	7	TAPE2 MON
22	9	TAPE1 REC
21	10	TAPE1 PB

Interchangeable Parts at Manufacture-Stage

Mark	Reference Parts Number	Parts Name
▲1	Q106-107	2SC2878[A/B] 2SD1915F[S/T]

IC101, 105 : NJM2068L-D
Dual OP-Amp

IC102 : LC78211
Analog Function Switch

IC104 : LB1641
Motor Driver



RESISTOR

REMARKS	PARTS NAME
NO MARK	CARBON FILM RESISTOR (P=5)
⊘	CARBON FILM RESISTOR (P=10)
△	METAL OXIDE FILM RESISTOR
▲	METAL FILM RESISTOR
⊠	METAL PLATE RESISTOR
◪	FIRE PROOF CARBON FILM RESISTOR
□	CEMENT MOLDED RESISTOR
⊘	SEMI VARIABLE RESISTOR
■	CHIP RESISTOR

CAPACITOR

REMARKS	PARTS NAME	
NO MARK	ELECTROLYTIC CAPACITOR	▲1
⊗	TANTALUM CAPACITOR	
NO MARK	CERAMIC CAPACITOR	▲1
⊛	CERAMIC TUBULAR CAPACITOR	
◎	POLYESTER FILM CAPACITOR	
○	POLYSTYRENE FILM CAPACITOR	
⊕	MICA CAPACITOR	
⊛	POLYPROPYLENE FILM CAPACITOR	
●	SEMICONDUCTIVE CERAMIC CAPACITOR	

* *All voltages are measured with a 10MΩ/DC electric volt meter.*
* *Components having special characteristics are marked ⚠ and must be replaced with parts having specifications equal to those originally installed.*
* *Schematic diagram is subject to change without notice.*